



SPECIFICATION SHEET

355-2501AR



FALCON™ VizAR AR/FR ANSI CLASS E HEAVY DUTY WATERPROOF BREATHABLE BIB OVERALLS

- 12 oz 100% cotton jersey PU coated FR shell that is waterproof and breathable
- ARC rating: ATPV 16.2 cal/cm²
- Heat applied FR reflective tape
- High-backed design
- FR hook and loop waist adjustment
- Snap adjustable cuffs
- NFPA 70E, ASTM F1891, ASTM F2733, ANSI 107-2015

APPLICATIONS

- Electrical contractors and utilities
- Petrochemical
- Mining
- Hospital and plant technical maintenance
- HVAC
- Wind energy
- Hybrid auto mechanics
- Environmental remediation
- Welding
- Telecommunications/cable
- Emergency services

CARE INSTRUCTIONS

Machine wash, use synthetic mild detergents, 104°F max. Wash separate from everyday clothing in small loads. Hang dry. Always wear fastened. The high visibility properties of this garment must be kept clean to be effective. If faded or permanently soiled it must be replaced with a new one. DO NOT dry clean. DO NOT bleach. DO NOT use fabric softener. DO NOT iron.

TECHNICAL DATA

MATERIAL	FR Polyurethane Coated 100% Cotton Jersey
CONSTRUCTION	Main: 100% cotton jersey coated with PU, 0.75mm thickness, 340g/m ² Accessories: 2" FR silver heat applied reflective tape, black FR elastic belt, FR hook & loop closure
COLOR	■ Hi-Vis Lime Yellow
SIZES	S - 5X
PACKAGING	1 per poly bag, 20 per case
CASE DIMENSIONS	22.8" x 17.7" x 11.78" / 58cm x 45cm x 30cm
CASE WEIGHT	19.8 lbs / 9 kg
COO	China


BARCODES

ITEM	BAG	DOZEN	CASE
■ 355-2501AR-LY/S	616314219832	01616314219831	02616314219830
■ 355-2501AR-LY/M	616314219849	01616314219848	02616314219847
■ 355-2501AR-LY/L	616314219856	01616314219855	02616314219854
■ 355-2501AR-LY/XL	616314219863	01616314219862	02616314219861
■ 355-2501AR-LY/2X	616314219870	01616314219879	02616314219878
■ 355-2501AR-LY/3X	616314219887	01616314219886	02616314219885
■ 355-2501AR-LY/4X	616314219894	01616314219893	02616314219892
■ 355-2501AR-LY/5X	616314219900	01616314219909	02616314219908



DIMENSIONS (in/cm)

	S	M	L	XL	2X	3X	4X	5X
A	28.5 / 72.4	28.8 / 73.2	29 / 73.7	29 / 73.7	29.3 / 74.4	29.3 / 74.4	29.5 / 74.9	29.5 / 74.9
B	49 / 124.5	51.5 / 130.8	54 / 137.2	56 / 142.2	58 / 147.3	60.5 / 153.7	63 / 160	65 / 165.1

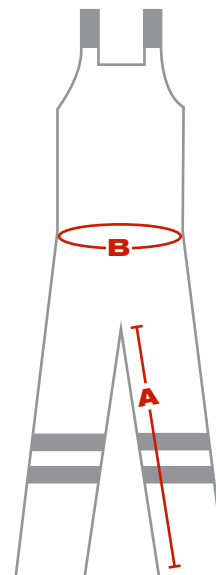

PROTECTIVE INDUSTRIAL PRODUCTS, INC. | BRINGING THE BEST OF THE WORLD TO YOU®

AMERICAS: (800) 262-5755 • (518) 861-0133 | EUROPE: +34-96182-41-48 | AMEA: (ASIA, MIDDLE EAST, AFRICA) 852-2475-9228 | www.pipglobal.com

This document and the information contained herein is the property of Protective Industrial Products, Inc. (PIP) and may not be used or reproduced without permission. Product users should conduct all appropriate testing or other evaluations to determine the suitability of PIP products for a particular purpose or use within a particular environment. PIP DISCLAIMS ALL WARRANTIES OTHER THAN AS EXPRESSLY PROVIDED.