




**501MRMHW - 10005MFRMHW**  
**Micrometer adjustable torque**  
**wrenches, Dual Scale**



**PRODUCT DETAILS**

- Dual scale, calibrated clockwise only
- Positive lock with spring loaded pull down lock ring
- Fast, accurate and easy to set
- Easy-to-read laser marked scales
- 1/4", 3/8", 1/2" drive feature quick release buttons which provide good socket retention as well as easy socket retention
- Accuracy:  $\pm 3\%$  CW of indicated value, CW from 20% to 100% of full scale
- Meets or exceeds ASME standards, ISO 6789 standards
- Individually serialized with matching certificate of calibration traceable to N.I.S.T

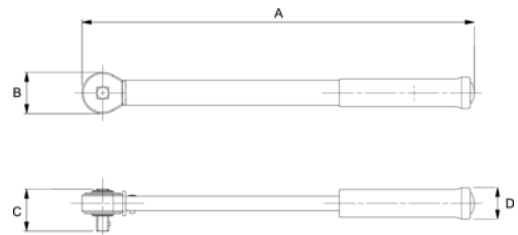

# PRODUCT ATTRIBUTES

## Product: 501MRMHW

	0.5 in-oz				10-50 lb-in
			1.4-5.4 Nm		2.5 lb
	1/4 in	<b>A</b>	10.15 in	<b>B</b>	1.06 in
<b>C</b>	0.93 in	<b>D</b>	1.06 in		

## Product: 1501MRMHW

	5 in-oz				0,12 lb-in	20-150 lb-in
			2.8-15.3 Nm		0.9 lb	
	1/4 in	<b>A</b>	10.15 in	<b>B</b>	1.06 in	
<b>C</b>	0.93 in	<b>D</b>	1.06 in		22.7 in	

## Product: 1002MFRMHW

	0.5 in-oz				0,7 lb-in	
	10-100 lb-ft		16.9-132.2 Nm		2.55 lb	
	3/8 in	<b>A</b>	16 in	<b>B</b>	1.43 in	
<b>C</b>	1.2 in	<b>D</b>	1.4 in			

## Product: 1502MRMHW

	5 in-oz				0,12 lb-in	20-150 lb-in
			2.8-15.3 Nm		0.85 lb	
	3/8 in	<b>A</b>	10.15 in	<b>B</b>	1.06 in	
<b>C</b>	0.93 in	<b>D</b>	1.06 in			

## Product: 10002MRMHW

	5 in-oz				0,6 lb-in	150-1000 lb-in
			19.8-110.2 Nm		2.5 lb	
	3/8 in	<b>A</b>	16 in	<b>B</b>	1.43 in	
<b>C</b>	1.2 in	<b>D</b>	1.4 in			

## Product: 2002MRMHW

	1 in-oz				0,12 lb-in	30-200 lb-in
			4.0-22.0 Nm		3.2 lb	
	3/8 in	<b>A</b>	10.15 in	<b>B</b>	1.06 in	
<b>C</b>	0.93 in	<b>D</b>	1.06 in			

## Product: 2502MRMHW

	1 in-oz				0,12 lb-in	30-250 lb-in
			4.0-27.7 Nm		0.85 lb	
	3/8 in	<b>A</b>	11.25 in	<b>B</b>	1.06 in	
<b>C</b>	0.93 in	<b>D</b>	1.06 in			

## Product: 7502MRMHW

	5 in-oz				0,6 lb-in	100-750 lb-in
			14.1-81.9 Nm		1.43 in	
	3/8 in	<b>A</b>	16 in	<b>B</b>	1.43 in	
<b>C</b>	1.2 in	<b>D</b>	1.4 in			

## Product: 752MFRMHW

	0.5 in-oz				0,7 lb-in	
	5-75 lb-ft		10.2-98.3 Nm		2.5 lb	
	3/8 in	<b>A</b>	16 in	<b>B</b>	1.43 in	
<b>C</b>	1.2 in	<b>D</b>	1.4 in			

## Product: 2503MFRMHW

	1 in-oz				1,4 lb-in	
	30-250 lb-ft		47-332 Nm		3.15 lb	
	1/2 in	<b>A</b>	24.4 in	<b>B</b>	1.7 in	
<b>C</b>	1.4 in	<b>D</b>	1.4 in			

## Product: 1503MFRMHW

	1 in-oz				1,4 lb-in	
	250-150 lb-ft		34-194 Nm		3.15 lb	
	1/2 in	<b>A</b>	19 in	<b>B</b>	1.7 in	
<b>C</b>	1.4 in	<b>D</b>	1.4 in			

## Product: 25003MRMHW

	10 in-oz				1,2 lb-in	300-2500 lb-in
			39.6-276.9 Nm		0.95 lb	
	1/2 in	<b>A</b>	18 in	<b>B</b>	1.7 in	
<b>C</b>	1.4 in	<b>D</b>	1.4 in			

## Product: 4004MFRMHW

	5 in-oz				3,4 lb-in	
	80-400 lb-ft		85-491 Nm		10.3 lb	
	3/4 in	<b>A</b>	34.25 in	<b>B</b>	2.5 in	
<b>C</b>	2.1 in	<b>D</b>	1.4 in			

## Product: 6004MFRMHW

	5 in-oz				6,8 lb-in	
	120-600 lb-ft		162-813 Nm		11.85 lb	
	3/4 in	<b>A</b>	42 in	<b>B</b>	2.5 in	
<b>C</b>	2 in	<b>D</b>	1.15 in			

## Product: 10005MFRMHW

	5 in-oz				6,8 lb-in	
	200-1.000 lb-ft		305-1.322 Nm		25.1 lb	
	1 in	<b>A</b>	70 in	<b>B</b>	3 in	
<b>C</b>	3 in	<b>D</b>	1.5 in			